

**ARCHITECTURAL GENERAL NOTES:**

SEE DEMOLITION PLAN FOR NEW CONCRETE SLAB REQUIRED

EACH CONTRACTOR SHALL VERIFY AND COORDINATE ALL DIMENSIONS, TOLERANCES, CONSTRUCTION CONDITIONS, ETC. AND REPORT ANY DISCREPANCIES TO THE ARCHITECT PRIOR TO THE COMMENCEMENT OF ANY WORK.

ALL DIMENSIONS GIVEN TO FACE OF FRAMING, FACE OF MASONRY, CENTERLINE OF STEEL, CENTERLINE OF DOORS, OR CENTERLINE OF WINDOWS UNLESS NOTED OTHERWISE.

THIS BUILDING AND ALL SITE WORK PERTAINING TO IT IS TO BE CONSTRUCTED IN STRICT ACCORDANCE WITH THE 2009 ASHRAE 90.1 AND THE 2010 AMERICANS WITH DISABILITIES ACT (ADA).

WITHIN FRAME CONSTRUCTION, ALL NEW DOOR LOCATIONS SHOWN ON DRAWINGS ARE SET 4" FROM FACE OF WALL FRAMING TO BACK OF DOOR JAMB UNLESS OTHERWISE NOTED.

WITHIN MASONRY CONSTRUCTION, ALL NEW DOOR LOCATIONS SHOWN ON DRAWINGS ARE SET 4" FROM FACE OF MASONRY TO BACK OF DOOR JAMB UNLESS OTHERWISE NOTED.

ALL FIRE RATED WALLS, FLOORS & ROOF TO BE FIRE STOPPED WITH U.L. APPROVED FIRE STOP ASSEMBLIES. SEE SPECIFICATIONS.

SEE LARGE SCALE UNIT PLANS FOR WINDOW LOCATION DIMENSIONS.

ALL 7 5/8" WALLS ARE 8" CMU.

ALL 11 5/8" WALLS ARE 12" CMU.

VERIFY AND COORDINATE NEW CONSTRUCTION F.F. ELEVATION WITH EXISTING BUILDING F.F. ELEVATION.


MAINTAIN BUILDING IN A WEATHER TIGHT CONDITION AT ALL TIMES DURING CONSTRUCTION.

TAKE ALL PRECAUTIONS NECESSARY TO MAINTAIN SECURITY OF THE OWNERS NORMAL OPERATIONS DURING CONSTRUCTION.

ALL PATCH AND REPAIR WORK SHALL BE PERFORMED IN A WORKMAN-LIKE MANNER BY EXPERIENCED TRADESMEN. SURFACE TEXTURE AND FINISH TO MATCH EXISTING ADJOINING CONDITION.

**Revisions:**


No:	Date:

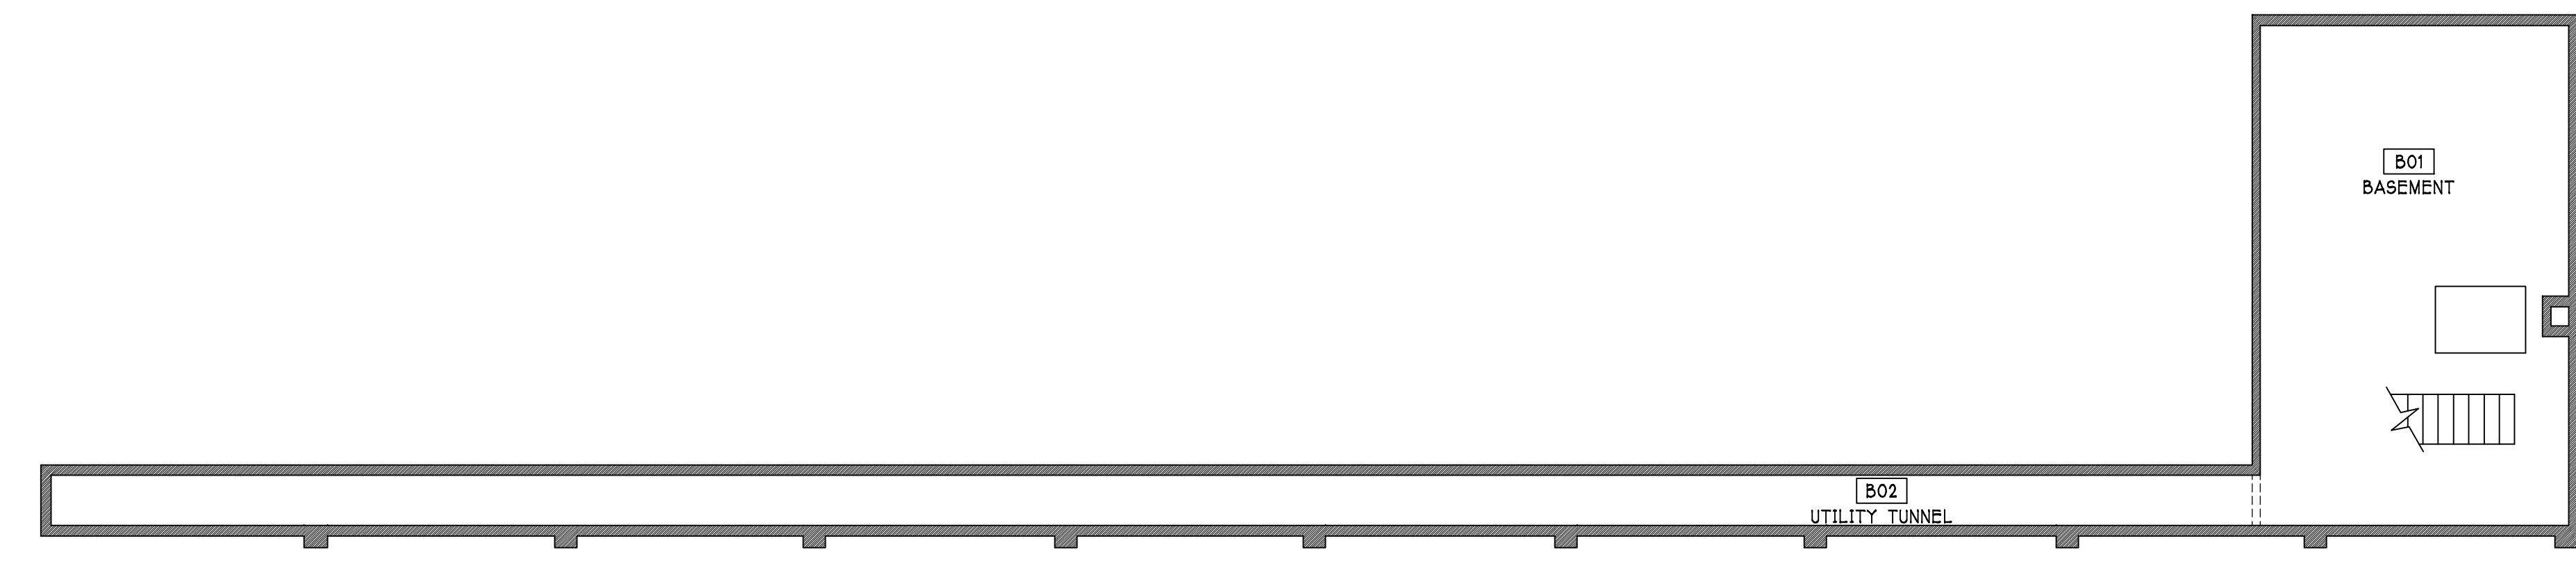

NO WORK IN THIS AREA

**BASEMENT FLOOR PLAN**

1/8" = 1'-0"

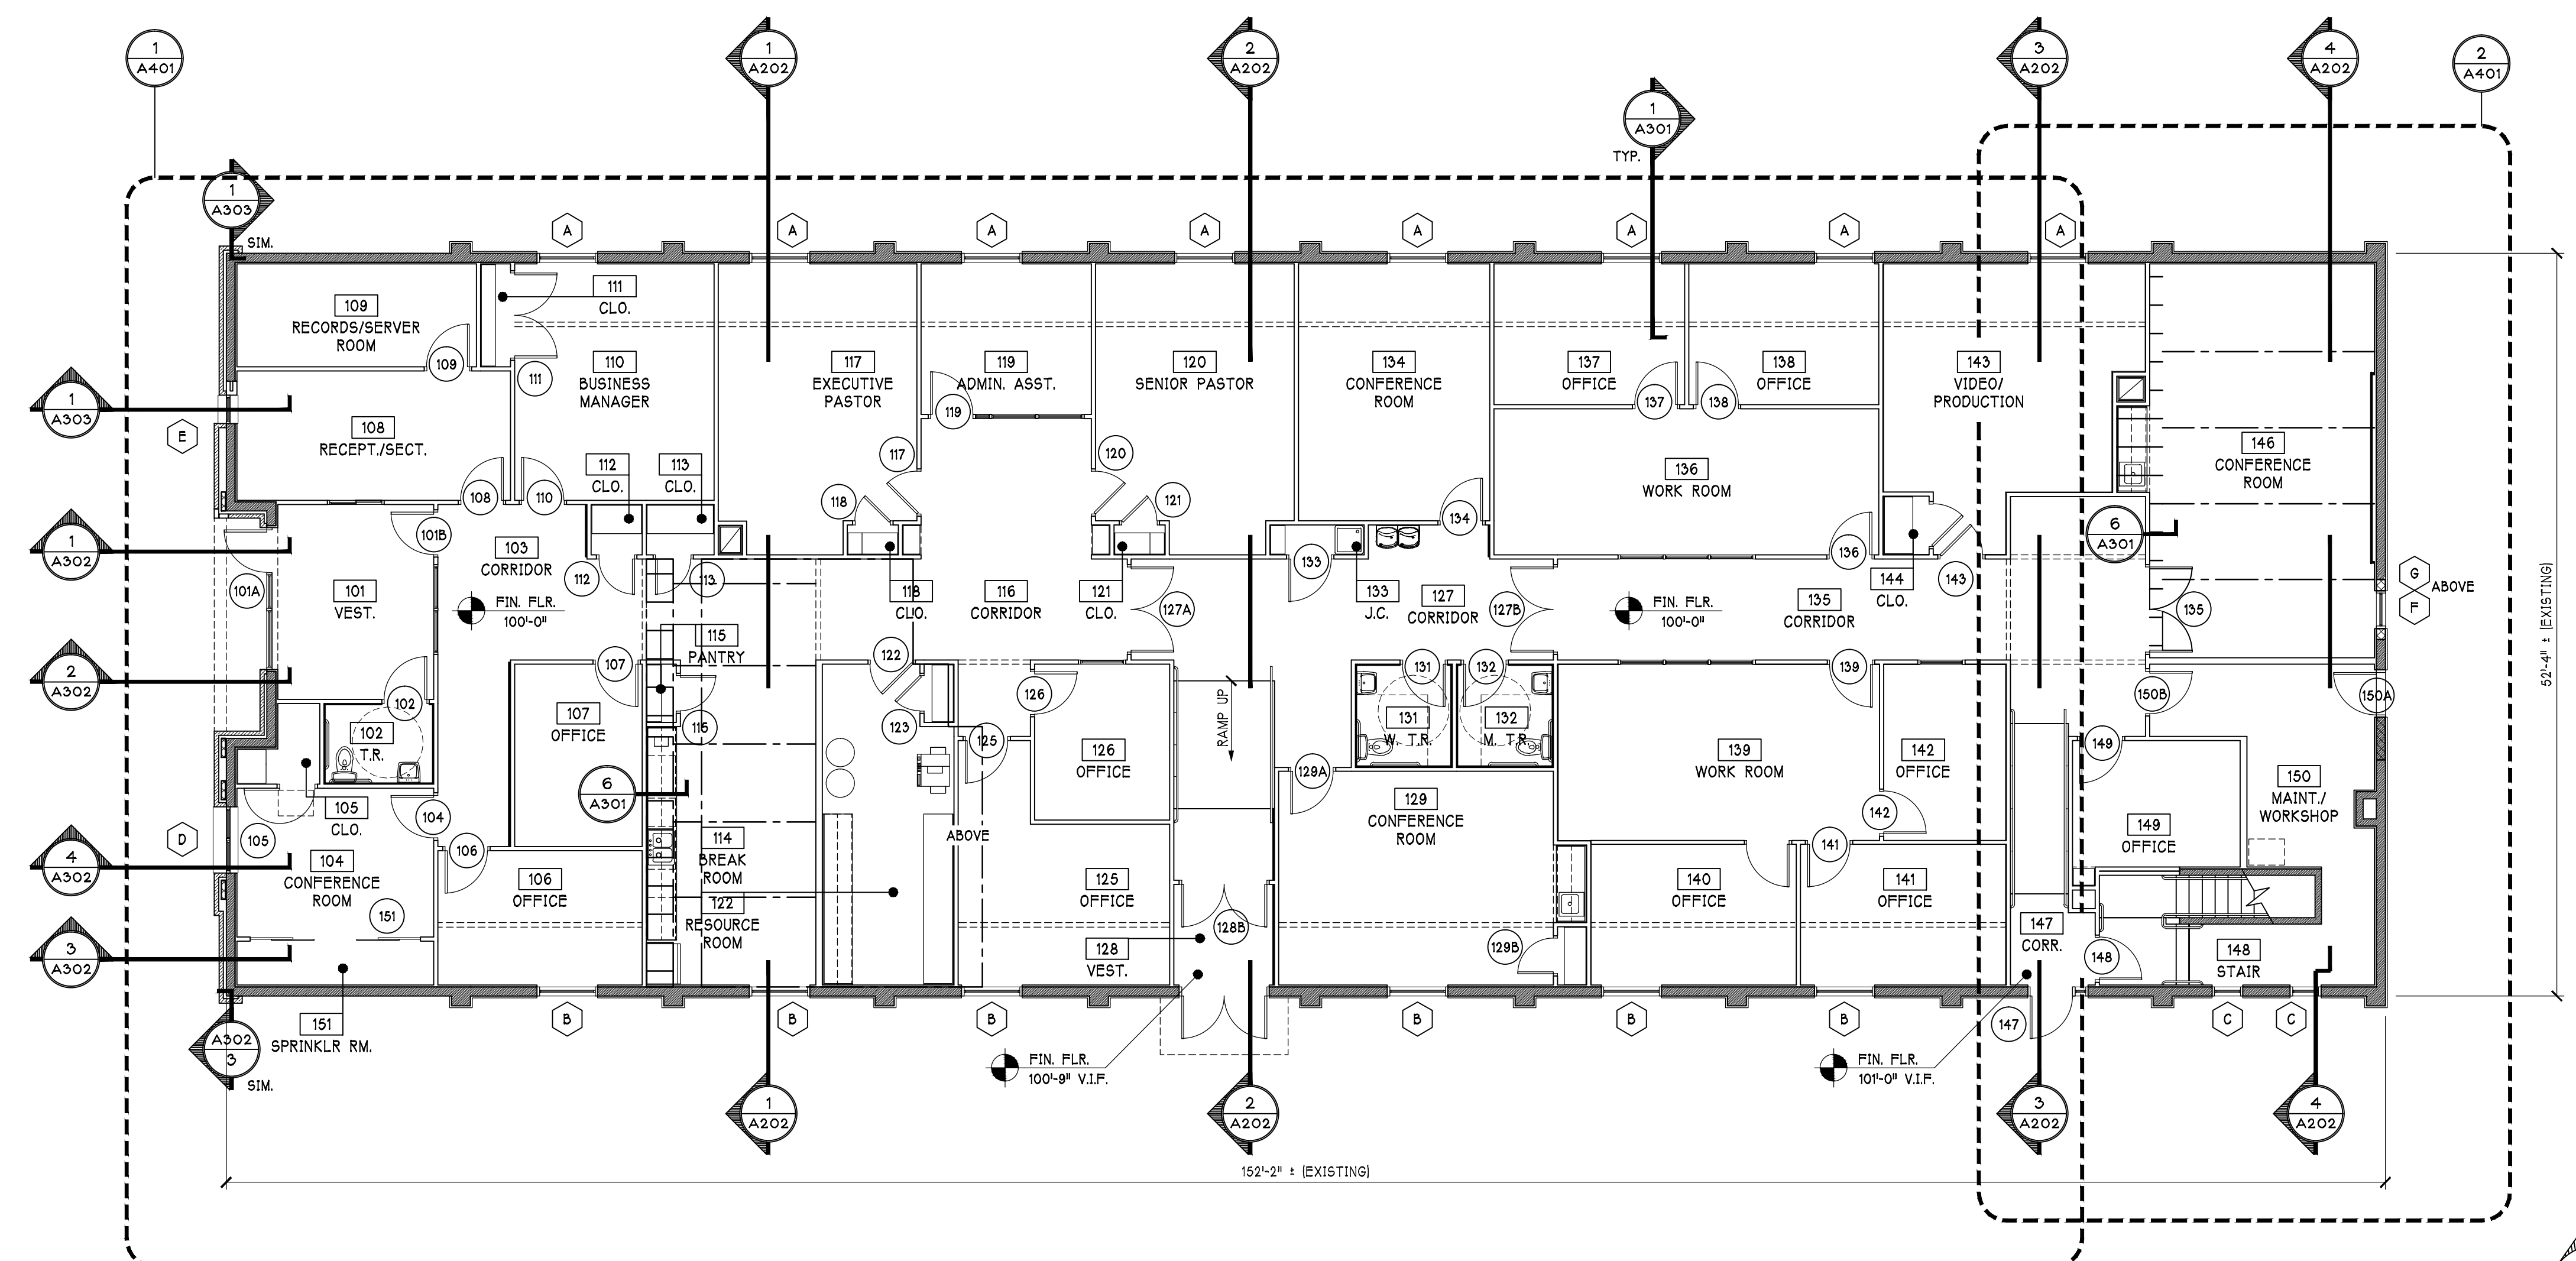

**FIRST FLOOR PLAN**

1/8" = 1'-0"

