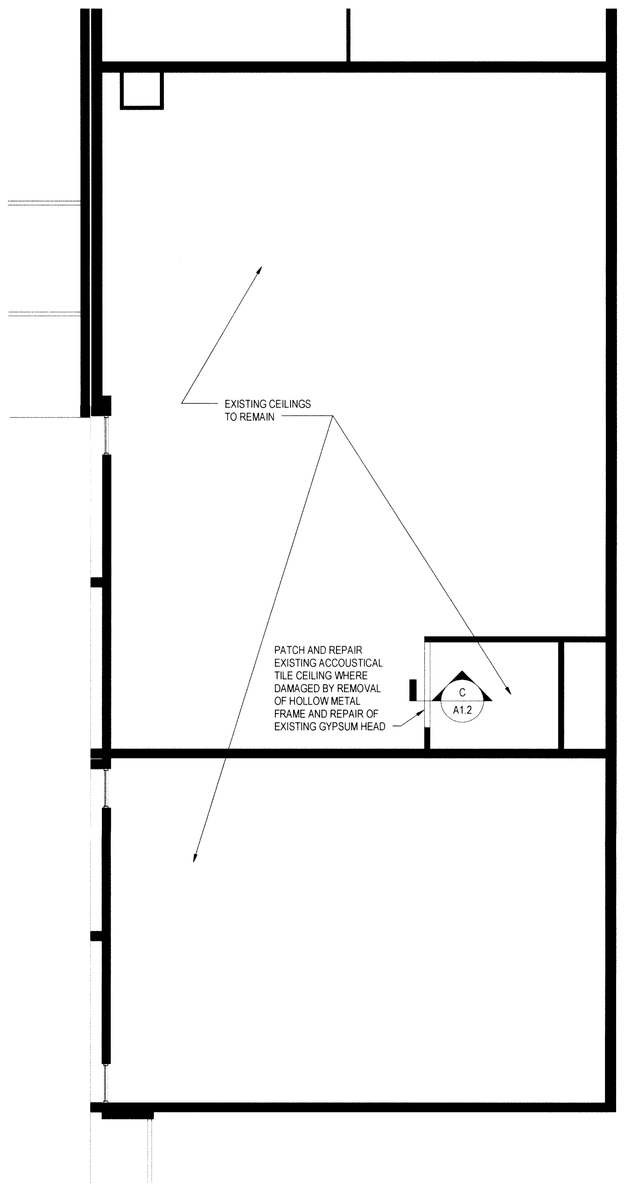

1 PARITAL REFLECTED CEILING PLAN
A1.2 1/8" = 1'-0"

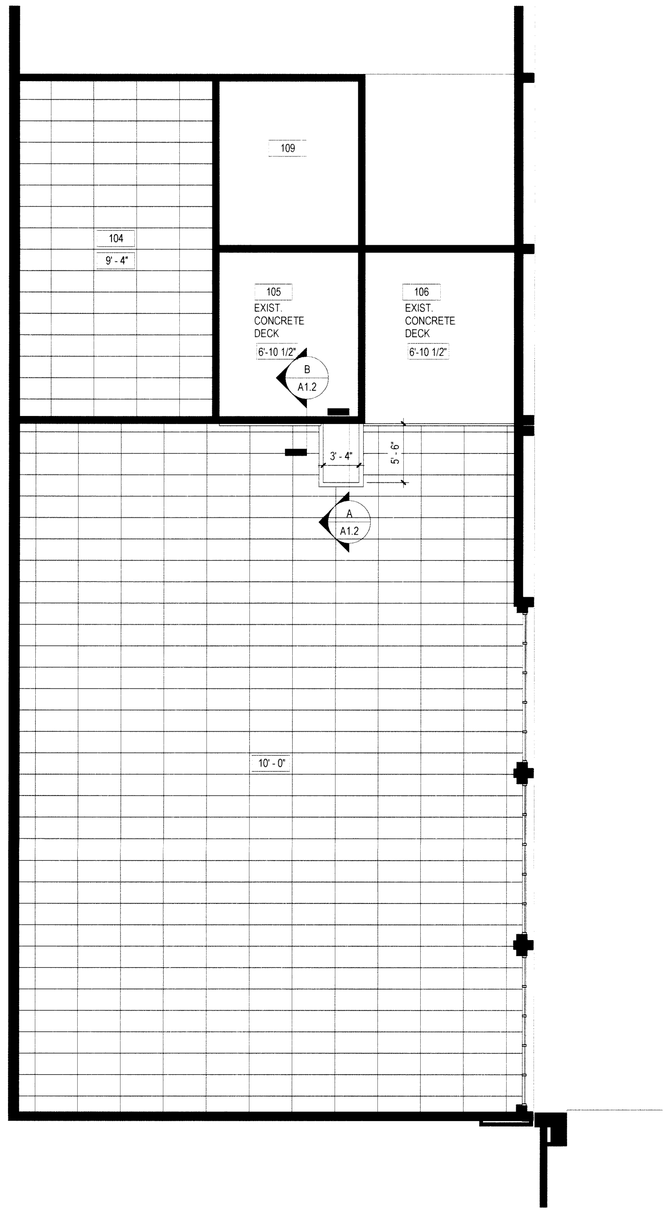

3 PARITAL REFLECTED CEILING PLAN - BASE
A1.2 1/8" = 1'-0"

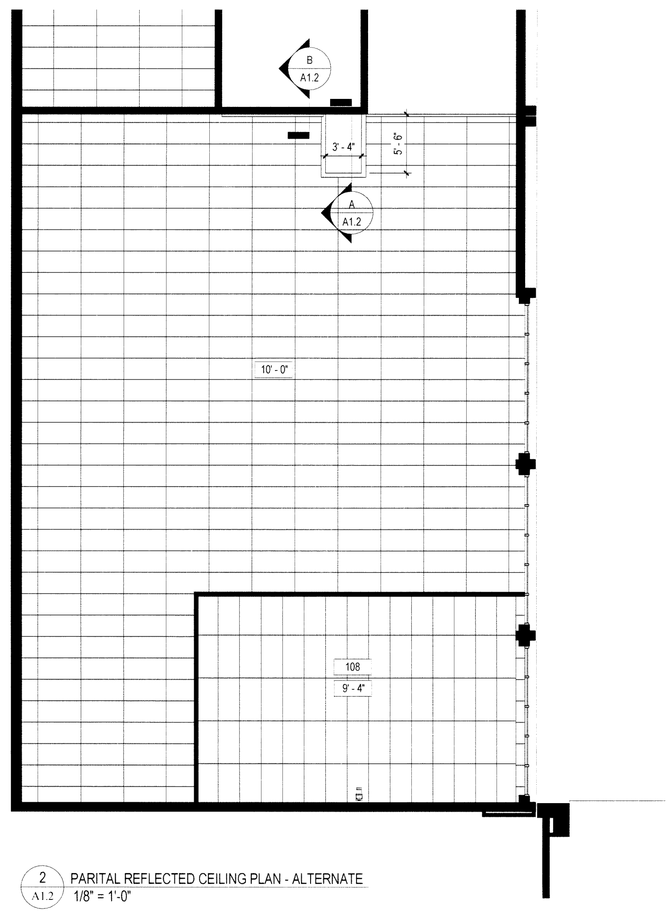

2 PARITAL REFLECTED CEILING PLAN - ALTERNATE
A1.2 1/8" = 1'-0"

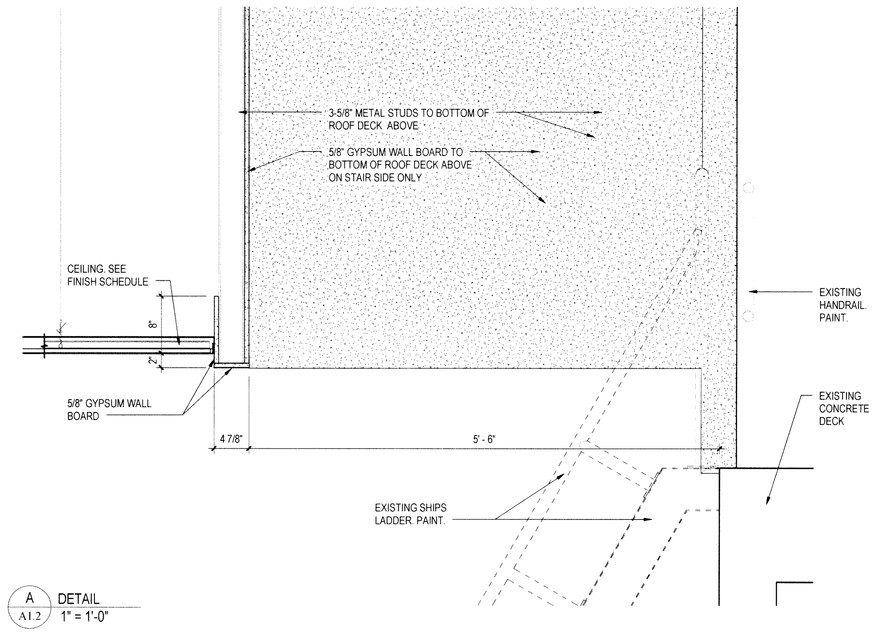

A A1.2 DETAIL
1" = 1'-0"

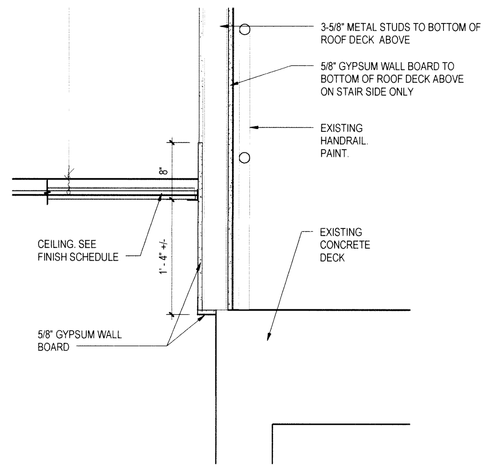

B A1.2 DETAIL
1" = 1'-0"

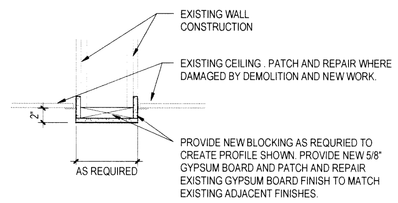

C A1.2 DETAIL
1" = 1'-0"

FLOOR PATTERN LEGEND	
TRANSITION SCHEDULE AS INDICATED ON A1 DRAWINGS	
VCT TO SCONC	JOHNSONITE NO. SSR-XX-B
CT TO VCT	MARBLE
SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.	



TYPE 1A-SIZE: 8"x8"
NOT TO SCALE



TYPE 4B-SIZE: 8"x8"
NOT TO SCALE
@ DOOR: 100

ROOM FINISH SCHEDULE

NUMBER	NAME	COLOR SCHEME	FLOOR	BASE	WALLS			CEILING FINISH	REMARKS
					WALL FINISH	WAINSCOT FINISH	WAINSCOT HEIGHT		
100	COSMETOLOGY	TBD	ETR	ETR/VB	ETR/PNT	--	--	ETR	--
101	LAUNDRY	TBD	VCT	VB	PNT	--	--	ETR/PNT	R2, R77
102	STOR.	--	--	--	--	--	--	--	NO WORK
103	CLASSROOM	--	--	--	--	--	--	--	NO WORK
104	ALLIED HEALTH CLASSROOM	TBD	VCT	VB	PNT	--	--	ACT1/ACT2	R52, R78
105	STORAGE	TBD	VCT	VB	PNT	--	--	PNT	--
106	LAUNDRY/ SINKS	TBD	VCT	VB	PNT/EPX	--	--	PNT	R55
107	ALLIED HEALTH	TBD	VCT/CT	VB/CT	PNT/EPX	--	--	ACT1/PNT	R3, R27, R53, R54, R55, R77
108	CLASSROOM	TBD	VCT	VB	PNT	--	--	ACT1	--
109	STORAGE	--	--	--	--	--	--	--	NO WORK
200	MEZZANINE	TBD	ETR	ETR	PNT	--	--	PNT	--

SIGNAGE SCHEDULE

ORIGINAL		SIGN TO READ		SIGNAGE TYPE				
ROOM#	ARCHITECTURAL ROOM NAME	ROOM#	SIGN TO READ	TYPE	ADA	FEMALE	MALE	QTY
100	COSMETOLOGY	TBD	EXIT	4B				1
101	LAUNDRY	--	--	--				0
102	STOR.	--	--	--				0
103	CLASSROOM	--	--	--				0
104	ALLIED HEALTH CLASSROOM	--	--	--				0
105	STORAGE	--	--	--				0
106	LAUNDRY/ SINKS	--	--	--				0
107	ALLIED HEALTH	TBD	ALLIED HEALTH	1A				1
108	CLASSROOM	TBD	CLASSROOM	1A				1
109	STORAGE	--	--	--				0
200	MEZZANINE	--	--	--				0

ROOM FINISH SCHEDULE LEGEND

FLOOR FINISH
- CT CERAMIC TILE
- VCT VINYL COMPOSITION TILE

FLOOR REMARKS
- R1: NOT USED
- R2: OWNER PROVIDED VCT AND INSTALLED BY THE GC.
- R3: PROVIDE CERAMIC TILE FLOORS AT THE BATHTUB.
- R4-R25: NOT USED

BASE FINISH
- CT CERAMIC TILE
- VB VINYL BASE

BASE REMARKS
- R26: NOT USED
- R27: PROVIDE CERAMIC TILE BASE AT THE NEW CMU WALLS ONLY.
- R28-R50: NOT USED

WALL FINISH
- CT CERAMIC TILE
- EPX EPOXY PAINT
- PNT PAINT

WALL REMARKS
- R51: NOT USED
- R52: PROVIDE PAINT AT EXISTING AND NEW WALLS AT PLAN NORTH WALL IN 104 & 109. REFER TO DRAWING I4.1 FOR THE EXTENTS.
- R53: PROVIDE PAINT AT BUMPER STOPS TO MATCH THE WALL PAINT.
- R54: PROVIDE EPOXY PAINT AT NEW CMU WALL ONLY.
- R55: PROVIDE EPOXY PAINT AT WALLS ADJACENT TO SINKS.
- R56-R75: NOT USED

CEILING FINISH
- ACT ACOUSTICAL CEILING TILE
- PNT PAINTED GYPSUM WALLBOARD

CEILING REMARKS
- R76: NOT USED
- R77: SEE REFLECTED CEILING PLANS FOR VARYING CEILING MATERIALS AND HEIGHTS.
- R78: CEILING TILE PROVIDED BY THE OWNER, GRID PROVIDED BY THE GC, GC SHALL INSTALL TILE AND GRID.
- R79-R100: NOT USED

GENERAL NOTES
1. REFER TO SPECIFICATIONS FOR DETAILED DESCRIPTION OF FINISH SYSTEM/TYPES.
2. REFER TO WALL TYPES FOR MASONRY LOCATIONS AND DETAILS.
3. GYPSUM WALLBOARD BULKHEADS AND SOFFITS SHALL BE PAINTED.
4. ALL HOLLOW METAL DOOR AND FRAMES, INTERIOR AND EXTERIOR, SHALL BE PAINTED.
5. ALL INTERIOR AND EXTERIOR FERROUS METAL SHALL BE PAINTED INCLUDING LINTELS, RAILINGS, GRILLES AND LOUVERS. (DOES NOT INCLUDE FACTORY OR PRE-FINISHED ITEMS)
7. ETR = EXISTING TO REMAIN

ALL REPORTS, PLANS SPECIFICATIONS AND COMPUTER FILES RELATING TO THIS PROJECT ARE THE PROPERTY OF CRABTREE, ROHRBAUGH & ASSOCIATES. CRABTREE ROHRBAUGH & ASSOCIATES RETAINS ALL COMMON LAW, STATUTE AND OTHER RESERVED RIGHTS INCLUDING THE COPYRIGHT THERETO. REPRODUCTION OF THE MATERIAL HEREIN OR SUBSTANTIAL USE WITHOUT WRITTEN PERMISSION OF CRABTREE, ROHRBAUGH & ASSOCIATES VIOLATES THE COPYRIGHT LAWS OF THE UNITED STATES AND WILL BE SUBJECT TO LEGAL PROSECUTION.
© CRABTREE, ROHRBAUGH & ASSOCIATES, INC 2014

REVISIONS

MM.DD.YR	NAME	DESCRIPTION OF CHANGES

CRABTREE ROHRBAUGH & ASSOCIATES - ARCHITECTS
401 EAST WINDING HILL ROAD
MECHANICSBURG PA 17055
717-458-0272 FAX 717-458-0047
www.cra-architects.com
250 WEST MAIN STREET, SUITE 200
CHARLOTTESVILLE VA 22902
434-975-7262 FAX 434-975-7263

RENOVATIONS TO COSMETOLOGY AND ALLIED HEALTH CLASSROOMS
FRANKLIN COUNTY CAREER AND TECHNOLOGY CENTER
FRANKLIN COUNTY TECHNICAL SCHOOL AUTHORITY
2463 LOOP ROAD CHAMBERSBURG, PENNSYLVANIA 17202

REFLECTED CEILING PLANS, ROOM FINISH, AND SIGNAGE SCHEDULE

PLOT SCALE: As indicated
FILENAME:
DATE: 4/30/2014

PROJECT
2776

A1.2